


MARTIN UNIVERSAL DESIGN, INC.
U-199N TRADITIONAL EASEL
ASSEMBLY INSTRUCTIONS

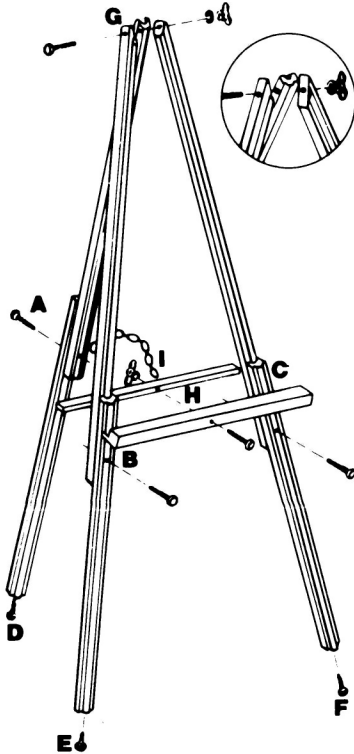

STEP (1)

Position all 3 leg posts (A, B, C) at the top (G). Insert 2" bolt through posts, securing with washer and wing nut.

STEP (2)

Attach rubber tips to bottom of legs (D, E, F) tap lightly with a hammer if needed.

STEP (3)

Position 3 leg posts (D, E, F) to desired height. Insert 2" bolt and secure at back with one washer and wing nut on each bolt. One end of chain must be attached to back bolt before securing with washer & wing nut.

STEP (4)


Attach canvas holder (H) and pressure bar (I) with 3" bolt. Place other end of chain over bolt, secure with wing nut.

PLEASE NOTE: All holes are drilled to close tolerances for maximum rigidity. It may be necessary to tap bolts in place with a hammer.

**PERIODIC RE-TIGHTENING
 OF EASEL WILL ASSURE A
 STURDY PRODUCT.**

Martin Universal Design, Inc.
 4444 Lawton Avenue, Detroit, MI 48208 U.S.A.
 Tel:(313)895-0700 • Fax:(313)895-0709

MARTIN UNIVERSAL DESIGN, INC.
U-199N TRADITIONAL EASEL
ASSEMBLY INSTRUCTIONS

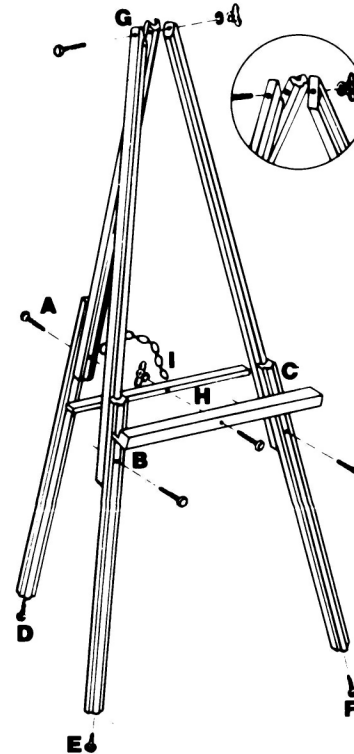

STEP (1)

Position all 3 leg posts (A, B, C) at the top (G). Insert 2" bolt through posts, securing with washer and wing nut.

STEP (2)

Attach rubber tips to bottom of legs (D, E, F) tap lightly with a hammer if needed.

STEP (3)

Position 3 leg posts (D, E, F) to desired height. Insert 2" bolt and secure at back with one washer and wing nut on each bolt. One end of chain must be attached to back bolt before securing with washer & wing nut.

STEP (4)

Attach canvas holder (H) and pressure bar (I) with 3" bolt. Place other end of chain over bolt, secure with wing nut.

PLEASE NOTE: All holes are drilled to close tolerances for maximum rigidity. It may be necessary to tap bolts in place with a hammer.

**PERIODIC RE-TIGHTENING
 OF EASEL WILL ASSURE A
 STURDY PRODUCT.**

Martin Universal Design, Inc.
 4444 Lawton Avenue, Detroit, MI 48208 U.S.A.
 Tel:(313)895-0700 • Fax:(313)895-0709